200486
DCCK 18 M 12 PSLK
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

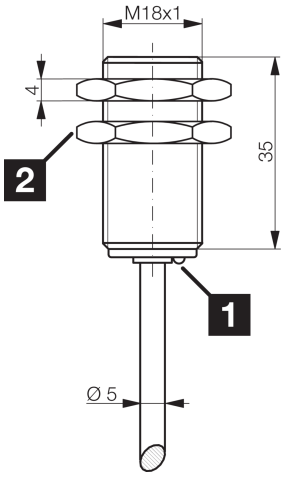

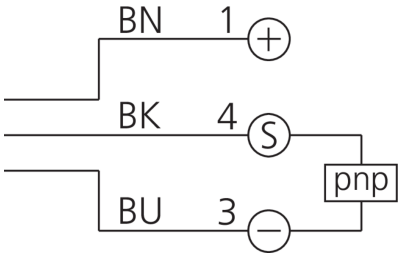

1) LED 2) Width over flats 24 mm BK: black BN: brown BU: blue

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	10 … 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Mechanical features	
Installation type	quasi-flush
Thread	M18 x 1
Housing length	36 mm
Housing material	Brass (chromium-plated)
Material of cable	PVC
Certifications, approvals	
Protection class	III, operation on protective low voltage
Approvals	UL
General features	
Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	extremely high operating distance

200486
DCCK 18 M 12 PSLK
Inductive proximity sensor

Technical data (typ.)	+20°C, 24 V DC
Product series	INE Industrial
Functional scope	
Scope of delivery	Sensor, 2 x M18 nuts
Output, input, interface	
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V (200 mA)
Detection range, measuring range, tolerance limits	
Switching distance (SN)	12 mm
Standardized measuring plate	36 x 36 x 1 mm
Switching hysteresis (max.)	< 3 … < 15 %
Time behavior	
Switching frequency	600 Hz
Ambient conditions	
Ambient temperature during operation	-25 … +70 °C
Protection type	IP 67
Electrical connection	
Connection	Cable, 2.0 m (flying leads)

More information / accessories	https://www.di-soric.com/200486

© di-soric . Right to change reserved