200510
DCCQ 05 M 0.8 PSLK
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED



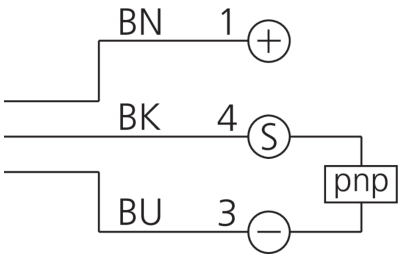

1) LED

BK: black BN: brown BU: blue

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	10 … 30 V DC
Internal power consumption	< 10 mA / < 10 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Mechanical features	
Installation type	Flush
Housing dimensions	5 x 5 mm
Housing length	25 mm
Housing height	5 mm
Housing width	5 mm
Housing material	Nickel brass (chromium-plated)
Material of cable	Polyurethane
Certifications, approvals	
Protection class	III, operation on protective low voltage
Approvals	UL
General features	
Operating principle	inductive
Evaluation	digital
Design	Cuboid design
Product series	INQ Cubic Model
Output, input, interface	
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V (200 mA)

© di-soric . Right to change reserved

200510
DCCQ 05 M 0.8 PSLK
Inductive proximity sensor

Technical data (typ.)	+20°C, 24 V DC
Detection range, measuring range, tolerance limits	
Switching distance (SN)	0.8 mm
Standardized measuring plate	5 x 5 x 1 mm
Switching hysteresis (max.)	< 10 %
Time behavior	
Switching frequency	3000 Hz
Ambient conditions	
Ambient temperature during operation	-25 … +70 °C
Protection type	IP 67
Electrical connection	
Connection	Cable, 2.0 m (flying leads)

More information / accessories	https://www.di-soric.com/200510

© di-soric . Right to change reserved