

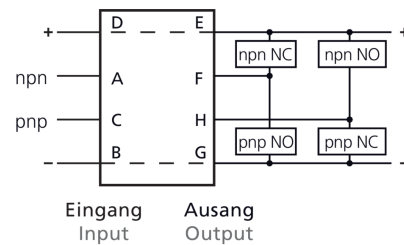




201635 SK-TPN-0.1 Sensor clamp

- Input: pnp and npn
- Output functions: pnp normally open, pnp normally closed, npn normally open, npn normally closed
- Pulse stretching
- Robust housing
- DIN-rail mountable

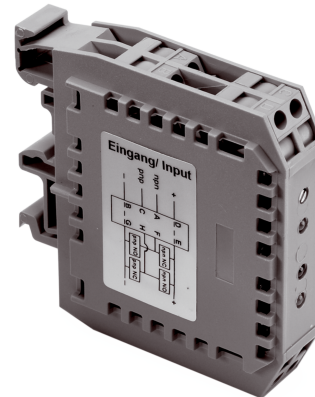

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
No-load current (max.)	22 mA
Short-circuit protection	No

General features

Component	Sensor clamp
-----------	--------------

Output, input, interface

Switching output	pnp/npn, 100 mA, NO/NC
Pulse stretching	10 ... 100 ms

Display, operation

Display	LED green - Service voltage, yellow - pnp opener-NC, Red - pnp closer-NO
---------	--

Time behavior

Switching frequency	20000 Hz
---------------------	----------

More information / accessories

<https://www.di-soric.com/201635>