



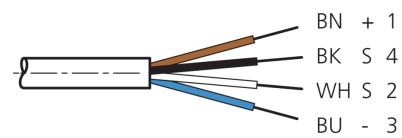

201725 TKHM-Z-2.5/4 Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

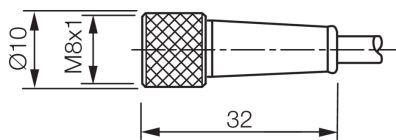

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

Electrical features

Service voltage	50 V AC / 60 V DC
-----------------	-------------------

Mechanical features

Length	2,500 mm
Diameter	Ø 4.5 mm (Diameter)
Thread	M8 x 1
Material of cable	Polyurethane, unshielded
Drag chain properties	45 mm (Min. bending radius)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Design	Straight / open cable end
Characteristics	Metal nut

Functional scope

Drag chain compatible	Yes
-----------------------	-----

Display, operation

LED Anzeige	No
-------------	----

Ambient conditions

Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65 / IP 66K / IP 67

Electrical connection

Connection	Socket, M8, 4-pin, A-coded
Cross-section	0.25 mm ² (4 x)

More information / accessories

<https://www.di-soric.com/201725>