





201729

TKH-W-2.5

Connection cable

- Drag chain compatible
- With click-stop device
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

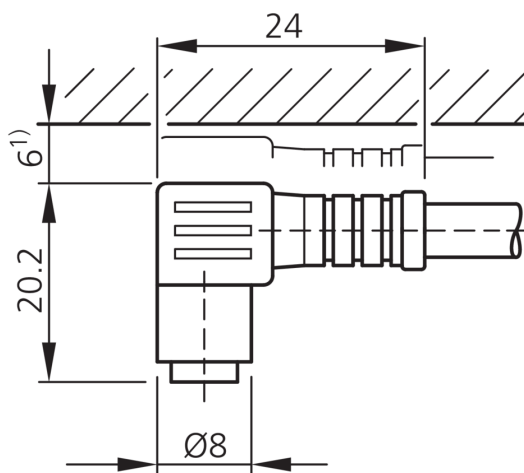

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

Electrical features

Service voltage	50 V AC / 60 V DC
-----------------	-------------------

Mechanical features

Length	2,500 mm
Diameter	Ø 4.1 mm (Diameter)
Thread	M8 Snap-in
Material of cable	Polyurethane, unshielded
Drag chain properties	41 mm (Min. bending radius)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Design	Angled / open cable end
Characteristics	Click-stop device for thread M8

Functional scope

Drag chain compatible	Yes
-----------------------	-----

Display, operation

LED Anzeige	No
-------------	----



201729
TKH-W-2.5
Connection cable

Technical data (typ.)**Ambient conditions**

Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65

Electrical connection

Connection	Click-stop device, M8, 3-pin, A-coded
Cross-section	0.25 mm ² (3 x)

More information / accessories<https://www.di-soric.com/201729>