




201732 TKH-Z-2.5 Connection cable

- Drag chain compatible
- With click-stop device
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

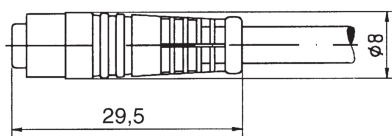

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

Electrical features

Service voltage 50 V AC / 60 V DC

Mechanical features

Length 2,500 mm
Diameter Ø 4.1 mm (Diameter)
Thread M8 Snap-in
Material of cable Polyurethane, unshielded
Drag chain properties 41 mm (Min. bending radius)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Straight / open cable end
Characteristics Click-stop device for thread M8

Functional scope

Drag chain compatible Yes

Display, operation

LED Anzeige No

Ambient conditions

Ambient temperature during operation -25 ... +85 °C (Movable, Fixed)
Protection type IP 65

Electrical connection

Connection Click-stop device, M8, 3-pin, A-coded
Cross-section 0.25 mm² (3 x)

More information / accessories

<https://www.di-soric.com/201732>