



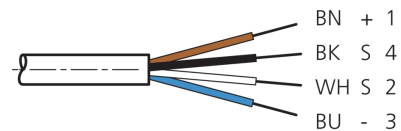

201840 VKHM-W-10/4 Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

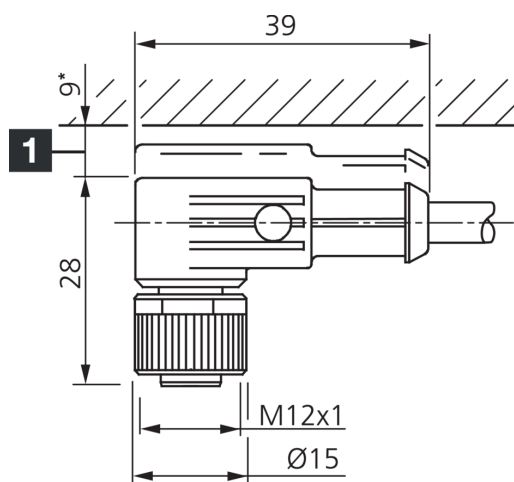

1) Mounting free space from upper edge of plug connector

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

Electrical features

Service voltage < 250 V AC/DC

Mechanical features

Length 10,000 mm
Diameter Ø 5.2 mm (Diameter)
Thread M12
Material of cable Polyurethane, unshielded
Drag chain properties 80 mm (Min. bending radius)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Angled / open cable end
Characteristics Metal nut

Functional scope

Drag chain compatible Yes

Display, operation

LED Anzeige No



201840
VKHM-W-10/4
Connection cable

Technical data (typ.)**Ambient conditions**

Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67

Electrical connection

Connection	Socket, M12, 4-pin, A-coded
Cross-section	0.34 mm ² (4 x)

More information / accessories

<https://www.di-soric.com/201840>