



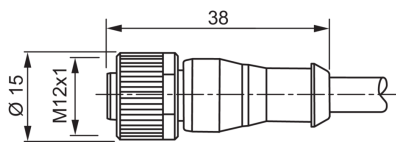

201866 VKHM-Z-10/4/LP Connection cable

- LEDs for service voltage and switching status
- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

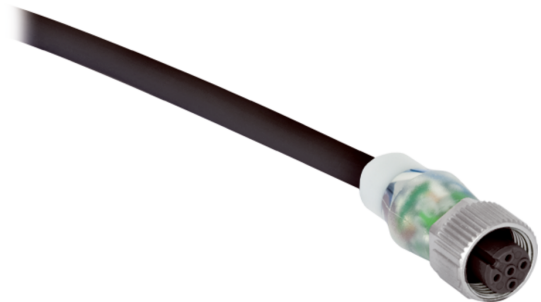


BK: black

BN: brown

BU: blue

WH: white

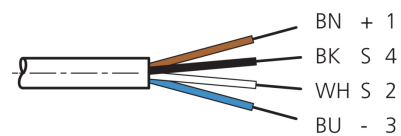

Function



Technical data (typ.)

Electrical features

Service voltage	< 31 V DC
-----------------	-----------

Mechanical features

Length	10,000 mm
Diameter	Ø 5.2 mm (Diameter)
Thread	M12
Material of cable	Polyurethane, unshielded
Drag chain properties	80 mm (Min. bending radius)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Design	Straight / open cable end
Characteristics	Metal nut

Functional scope

Drag chain compatible	Yes
-----------------------	-----

Display, operation

LED Anzeige	Yes
-------------	-----

Ambient conditions

Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67

Electrical connection

Connection	Socket, M12, 4-pin, A-coded
Cross-section	0.34 mm ² (4 x)

More information / accessories

<https://www.di-soric.com/201866>