




201870 VKHM-Z-2.5 Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Flexible lead design
- High protection type

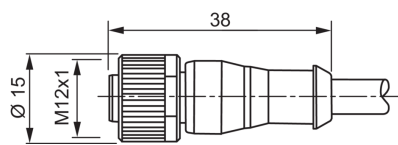

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C

Electrical features

Service voltage < 250 V AC/DC

Mechanical features

Length 2,500 mm
Diameter Ø 4.3 mm (Diameter)
Thread M12 x 1
Material of cable Polyurethane
Material Polyurethane (Connector)
Drag chain properties

- < 2 Mio. (Bending cycles)
- 3.3 m/s (Max. moving speed)
- 5 m/s² (Max. acceleration)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Component Connection cable
Design Straight / open cable end
Characteristics A-coded, Metal nut

Functional scope

Drag chain compatible Yes

Display, operation

LED Anzeige No

Ambient conditions

Ambient temperature during operation -5 ... +80 °C (Movable, Fixed)
Protection type IP 67 (at tightening torque 0.6 Nm)

Electrical connection

Connection Socket, M12, 3-pin
Connection 2 0.34 mm² (3 x)



201870
VKHM-Z-2.5
Connection cable

[More information / accessories](#)

<https://www.di-soric.com/201870>