




201927 WRB 110 S-M6-2.5 Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

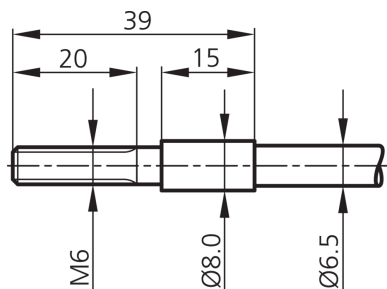

Technical data (typ.)

+20°C, 24 V DC

Mechanical features

Length	300 mm
Dimension fiber bundle	Ø 2.5 mm
Housing length	15 mm
Light aperture	axial
Mounting diameter	Ø 8 mm
Bending radius	> 3 x tube-Ø
Material of fiber	Glass fibers
Material	■ Stainless steel (Sensor probe) ■ Silicone-metal sleeve (Coating)

General features

Component	Glass fiber optics
Operating principle	Diffuse sensor
Design	Thread
Single fiber	Ø 0.05 mm
To be used for	Amplifiers for glass fiber optics
For FS 12-100-2 M G3-B8	To be used

Optical data

Opening angle	67°
---------------	-----

Detection range, measuring range, tolerance limits

Scanning range	85 mm
----------------	-------

Ambient conditions

Temperature resistance	-40 ... +180 °C (temporarily up to +250 °C)
Protection type	IP 67

More information / accessories

<https://www.di-soric.com/201927>