



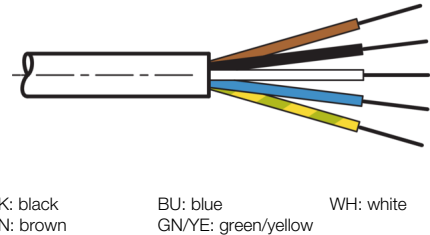

202645 VKHM-Z-5/5 Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

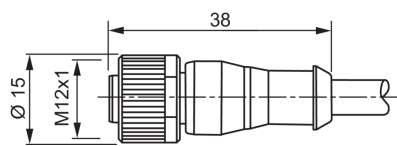

BN	+	1
BK	S	4
WH	S	2
BU	-	3
GN/YE	⏏	5

BK: black
BN: brown

BU: blue
GN/YE: green/yellow

WH: white

Function



Technical data (typ.)

Electrical features

Service voltage	125 V AC/DC
-----------------	-------------

Mechanical features

Length	5,000 mm
Diameter	Ø 4.8 mm (Diameter)
Thread	M12
Material of cable	Polyurethane, unshielded
Drag chain properties	48 mm (Min. bending radius)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Design	Straight / open cable end
Characteristics	Metal nut

Functional scope

Drag chain compatible	Yes
-----------------------	-----

Display, operation

LED Anzeige	No
-------------	----

Ambient conditions

Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65 / IP 66K / IP 67

Electrical connection

Connection	Socket, M12, 5-pin, A-coded
Cross-section	0.34 mm ² (5 x)

More information / accessories

<https://www.di-soric.com/202645>



202645
VKHM-Z-5/5
Connection cable