




202851

TKHM-Z/TSM-Z/U

Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

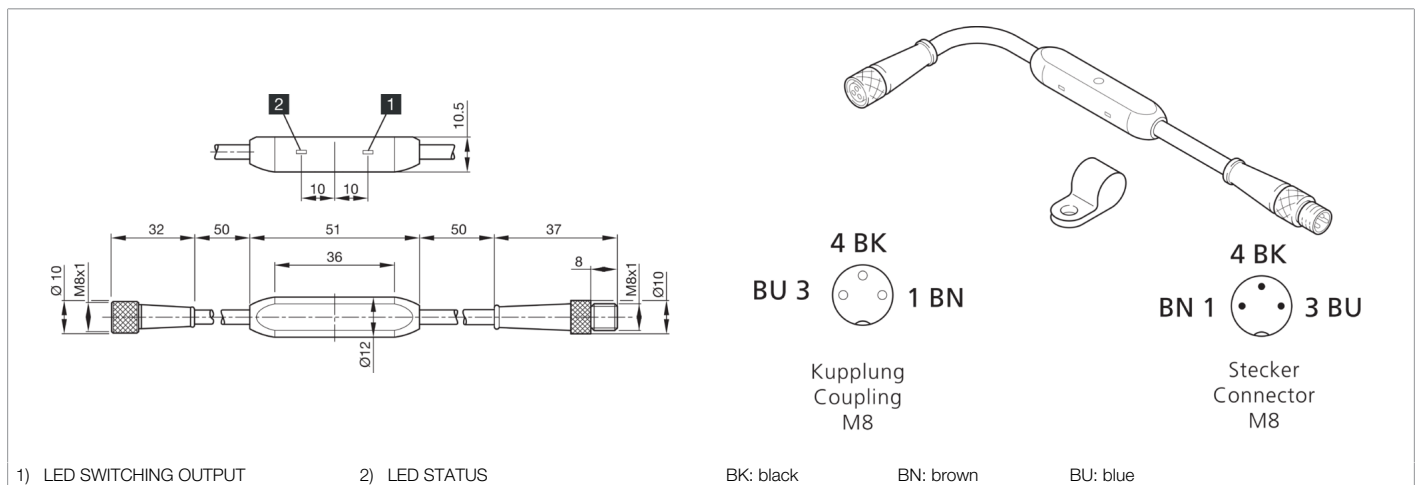

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 ... 35 V DC
No-load current (max.)	20 mA

Mechanical features

Thread	M8 x 1
Housing material	Plastic

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Evaluation	pnp -> npn converter
Application	Digital signal

Time behavior

Switching frequency	5000 Hz
---------------------	---------

Ambient conditions

Ambient temperature during operation	-20 ... +70 °C
Protection type	IP 67



202851
TKHM-Z/TSM-Z/U
Function adapters

Technical data (typ.)**+20°C, 24 V DC****Electrical connection**

Connection

Pigtail, Coupling, M8, 3-pin

Connection 2

Pigtail, Connector, M8, 3-pin

More information / accessories**<https://www.di-soric.com/202851>**