



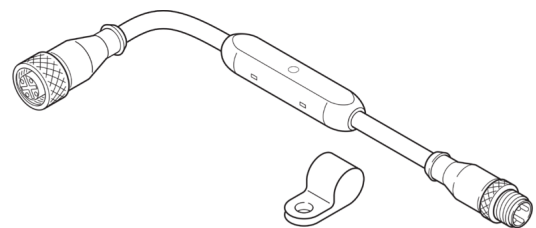

202856 VKHM-Z/VSM-Z/P4 Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

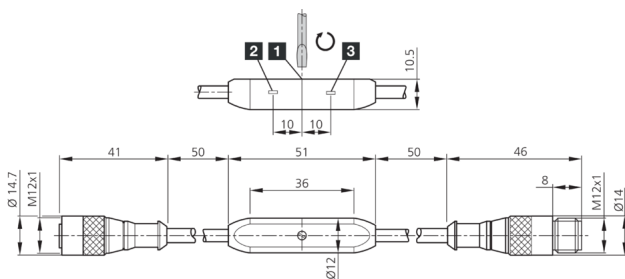

BU 3 4 BK
n.c. 1 BN
Kupplung
Coupling
M12

BK 4 3 BU
BN 1 n.c.
Stecker
Connector
M12

- 1) Potentiometer (only ...TSM-Z/T) 3) LED SWITCHING OUTPUT
2) LED STATUS

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 ... 35 V DC
No-load current (max.)	20 mA

Mechanical features

Thread	M12 x 1
Housing material	Plastic

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Evaluation	npn antivalence device
Application	Digital signal

Functional scope

Function selection	npn
--------------------	-----

Output, input, interface

Switching output	npn (2x)
------------------	----------



202856
VKHM-Z/VSM-Z/P4
Function adapters

Technical data (typ.)		+20°C, 24 V DC
Time behavior		
Switching frequency		3500 Hz
Ambient conditions		
Ambient temperature during operation		-20 ... +70 °C
Protection type		IP 67
Electrical connection		
Connection		Pigtail, Coupling, M12, 4-pin
Connection 2		Pigtail, Connector, M12, 3-pin
More information / accessories		https://www.di-soric.com/202856