




203253 VSHM-Z-0.6/VKM-Z/4 Connection cable

- Connection cable: Connector / coupling
- Sturdy metal union nut
- Flexible lead design
- High protection type

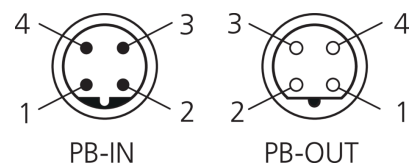

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage < 250 V AC/DC

Mechanical features

Length 600 mm
Material of cable Polyurethane, unshielded
Drag chain properties > 2 Mio. (Bending cycles)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Component Connection cable
Design Straight / straight
To be used for Device plug M12, 4-pin

Functional scope

Drag chain compatible Yes

Ambient conditions

Ambient temperature during operation -5 ... +80 °C (Movable, Fixed)
Protection type IP 67 (at tightening torque 0.6 Nm)

Electrical connection

Connection Connector, M12, 4-pin, A-coded
Connection 2 Socket, M12, 4-pin, A-coded
Cross-section 0.34 x 0.34 mm (4 x)

More information / accessories

<https://www.di-soric.com/203253>