



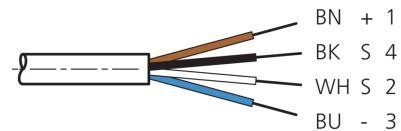

203526 TKPM-W-2.5/4 Connection cable

- Cable material made of PVC for applications in wet rooms or under water
- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts



1) Mounting free space from upper edge of plug connector

2) LED (2x) only with TKHM-W- ... / LP

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

Electrical features

Service voltage < 60 V AC/DC

Mechanical features

Length 2,500 mm
Diameter Ø 4.8 mm (Diameter)
Thread M8 x 1
Material of cable PVC, unshielded

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Angled / open cable end
Characteristics Metal nut

Display, operation

LED Anzeige No

Ambient conditions

Ambient temperature during operation -5 ... +80 °C (Movable, Fixed)
Protection type IP 67

Electrical connection

Connection Socket, M8, 4-pin, A-coded
Cross-section 0.25 mm² (4 x)

More information / accessories

<https://www.di-soric.com/203526>