



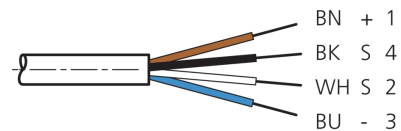

203536 VKPM-W-5/4/LP Connection cable

- Cable material made of PVC for applications in wet rooms or under water
- LEDs for service voltage and switching status
- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

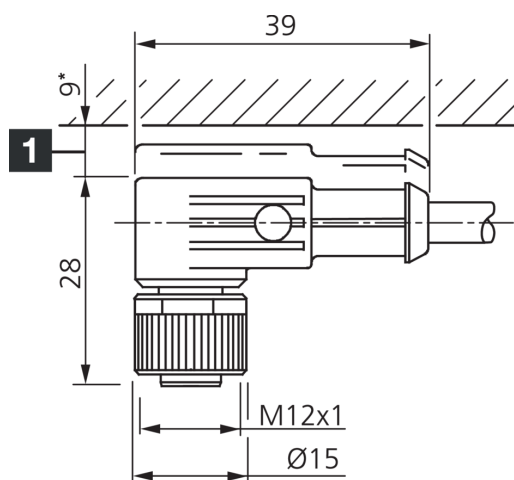

1) Mounting free space from upper edge of plug connector

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage < 31 V DC

Mechanical features

Length 5,000 mm
Diameter Ø 5.0 mm (Diameter)
Thread M12
Material of cable PVC
Material PVC (Connector)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Angled / open cable end
Characteristics Metal nut

Display, operation

LED Anzeige Yes



203536
VKPM-W-5/4/LP
Connection cable

Technical data (typ.)**+20°C, 24 V DC****Ambient conditions**

Ambient temperature during operation

-5 ... +80 °C (Movable, Fixed)

Protection type

IP 67 (at tightening torque 0.6 Nm)

Electrical connection

Connection

Socket, M12, 4-pin

Connection 2

0.34 mm² (4 x)**More information / accessories**<https://www.di-soric.com/203536>