





203642 TKHM-Z-15 Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

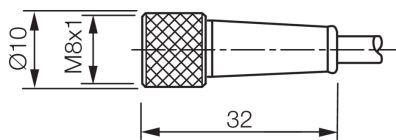

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

Electrical features

Service voltage < 60 V AC/DC

Mechanical features

Length 15,000 mm
Diameter Ø 4.5 mm (Diameter)
Thread M8 x 1
Material of cable Polyurethane, unshielded

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Straight / open cable end
Characteristics Metal nut

Functional scope

Drag chain compatible Yes

Display, operation

LED Anzeige No

Ambient conditions

Ambient temperature during operation -5 ... +80 °C (Movable, Fixed)
Protection type IP 67

Electrical connection

Connection Socket, M8, 3-pin, A-coded
Cross-section 0.25 mm² (3 x)

More information / accessories

<https://www.di-soric.com/203642>