



- High protection type IP 67
- Compact design
- Metal thread
- Plastic housing

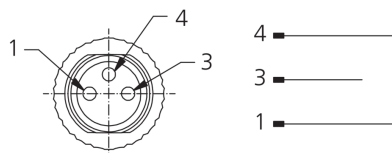

Function

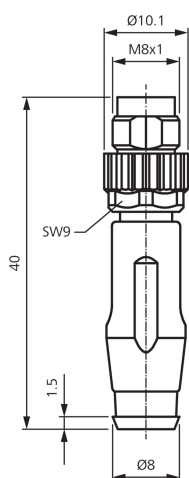

Technical data (typ.)

+20°C, 24 V DC

Electrical features

Current-carrying capacity	3000 mA (at 40°)
Service voltage	60 V DC

Mechanical features

Housing material	Plastic / Metal
------------------	-----------------

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Evaluation	AND/OR
Characteristics	Metal nut
To be used for	Logic distributor AV4 AND/OR

Output, input, interface

Switching output	Not available
------------------	---------------

Ambient conditions

Ambient temperature during operation	-30 ... +80 °C
Protection type	IP 67 (at tightening torque 0.4 Nm)



203682
BS-Z-8-UND
Shorting plug

Technical data (typ.)

+20°C, 24 V DC

Electrical connection

Connection

Connector, M8, 3-pin

Connection 2

Not available

More information / accessories

<https://www.di-soric.com/203682>