204292
DCC 05 V 2.5 PSLK
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

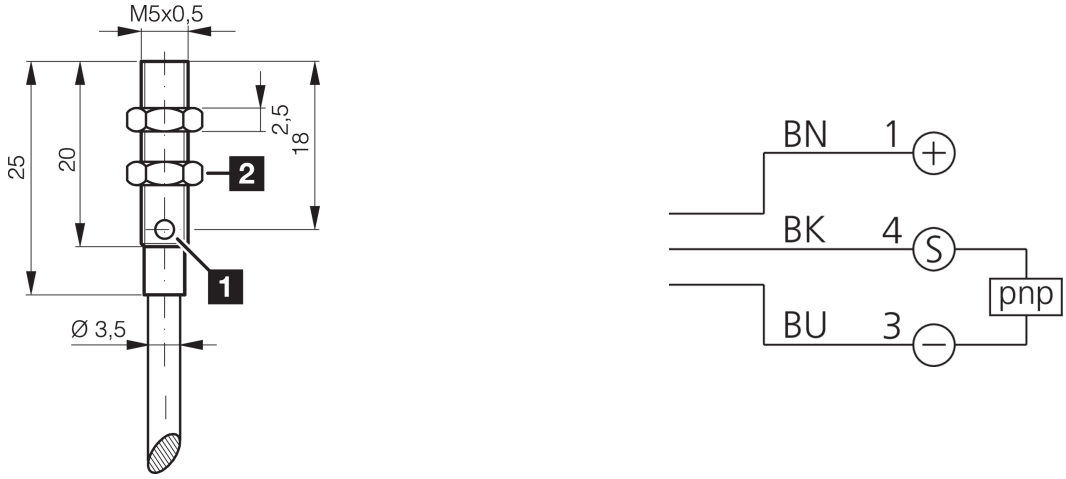

1) LED 2) Width over flats 7 mm BK: black BN: brown BU: blue

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	10 … 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Mechanical features	
Installation type	Flush
Thread	M5 x 0.5
Housing length	25 mm
Housing material	Nickel-silver (chromium-plated)
Material of cable	PVC
Tightening torque	1.5 Nm
Certifications, approvals	
Protection class	III, operation on protective low voltage
Approvals	UL
General features	
Operating principle	inductive
Evaluation	digital
Design	Thread

© di-soric . Right to change reserved

204292
DCC 05 V 2.5 PSLK
Inductive proximity sensor

Technical data (typ.)	+20°C, 24 V DC
Characteristics	extremely high operating distance
Design	Miniature design
Product series	INM Miniature
Functional scope	
Scope of delivery	Sensor, 2 x M5 nuts, 2 x washers
Output, input, interface	
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V (200 mA)
Detection range, measuring range, tolerance limits	
Switching distance (SN)	2.5 mm
Standardized measuring plate	7.5 x 7.5 x 1 mm
Switching hysteresis (max.)	3 … 15 %
Time behavior	
Switching frequency	800 Hz
Ambient conditions	
Ambient temperature during operation	-25 … +70 °C
Protection type	IP 67
Electrical connection	
Connection	Cable, 2.0 m (flying leads)

More information / accessories	https://www.di-soric.com/204292

© di-soric . Right to change reserved