204382
AV2-UND/ODER-PS-IBS
Connection distributor

- Suitable for all standard sensors
- Switching function AND/OR switchable
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- High protection type

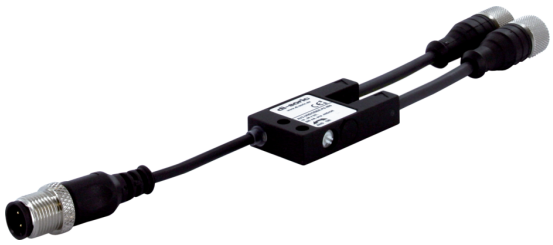

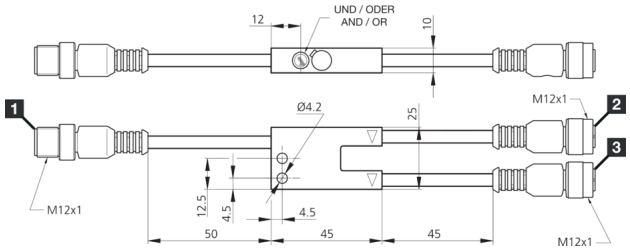

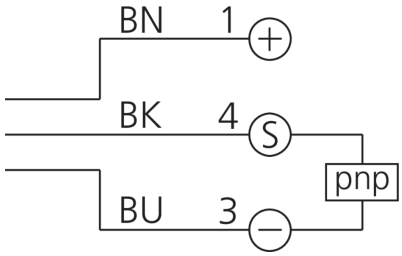

1) Connector
2) Coupling
3) Coupling

BK: black
BN: brown
BU: blue

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	10 … 35 V DC
No-load current (max.)	14 mA
Mechanical features	
Housing material	Die-cast zinc (Black, painted)
Certifications, approvals	
Protection class	III, operation on protective low voltage
General features	
Evaluation	AND/OR
Output, input, interface	
Switching output	pnp, 200 mA, AND/OR
Ambient conditions	
Ambient temperature during operation	-25 … +70 °C
Protection type	IP 67
Electrical connection	
Connection	Pigtail, Connector, M12, 3-pin
Connection 2	Pigtail, Socket, M12, 3-pin (2x)

More information / accessories	https://www.di-soric.com/204382

© di-soric . Right to change reserved