



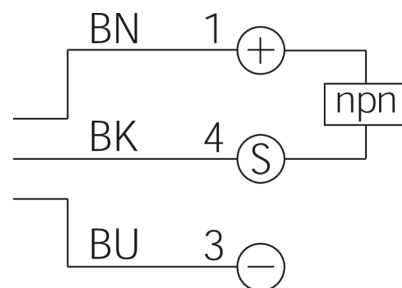

205309
DCCQ 08 M 03 NOLK
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

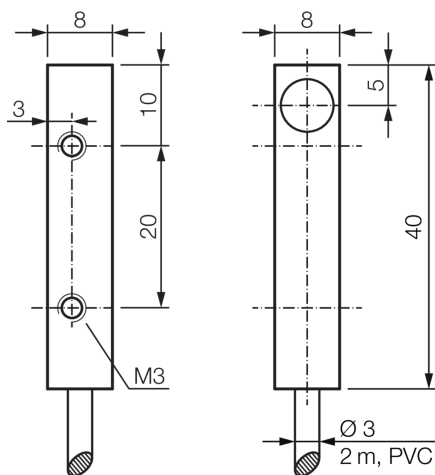

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V

Mechanical features

Installation type	quasi-flush
Housing dimensions	8 x 8 mm
Housing length	40 mm
Housing height	8 mm
Housing width	8 mm
Housing material	Brass (nickel-plated)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Operating principle	inductive
Evaluation	digital
Design	Cuboid design
Product series	INQ Cubic Model



205309
DCCQ 08 M 03 NOLK
Inductive proximity sensor

Technical data (typ.)		+20°C, 24 V DC
Output, input, interface		
Switching output	npn, 200 mA, NC	
Voltage drop (max.)	2.4 V	
Detection range, measuring range, tolerance limits		
Switching distance (SN)	3 mm	
Standardized measuring plate	9 x 9 x 1 mm	
Switching hysteresis (max.)	< 15 %	
Time behavior		
Switching frequency	1000 Hz	
Ambient conditions		
Ambient temperature during operation	-25 ... +70 °C	
Protection type	IP 67	
Electrical connection		
Connection	Cable, 2.0 m (flying leads)	
More information / accessories		https://www.di-soric.com/205309