




206797
WRBT 1000 K-M3-K
Plastic fiber optics

- Coaxial fiber configuration
- Highly precise detection
- Focusing optics VOM-M3 for smallest light spot
- cannot be shortened

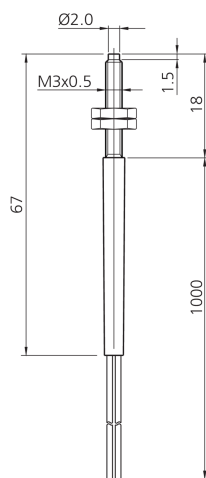

Technical data (typ.)

+20°C

Mechanical features

Light aperture	axial
Bending radius	> 15 mm
Material of fiber	Plastic
Material	■ VA (Thread sleeve) ■ PE (Coating)

General features

Operating principle	Diffuse sensor
Design	Thread
Single fiber-optics	Ø 2.2 mm
Single fiber	Ø 0.50 mm (151 x 0.075 mm)
To be used for	Device series OLV-K Amplifier

Optical data

Opening angle	56°
---------------	-----

Ambient conditions

Temperature resistance	-55 ... +70 °C
------------------------	----------------

More information / accessories

<https://www.di-soric.com/206797>