





206904
VKHM-Z-2/RJ45
Ethernet cable

- For Ethernet connection
- Drag chain compatible
- Oil-resistant

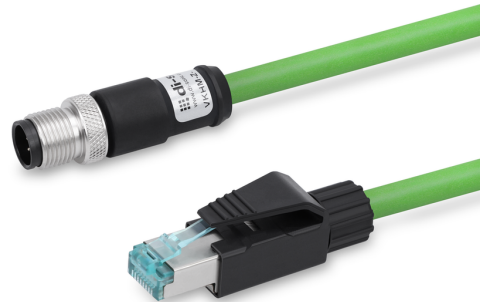

PIN	Port B: Ethernet
1	V (+)
2	V (-)
3	V (-)
4	TX (-)
5	RX (+)
6	TX (+)
7	V (+)
8	RX (-)

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	30 V DC
-----------------	---------

Mechanical features

Length	2,000 mm
Thread	M12
Material of cable	Polyurethane, unshielded
Drag chain properties	■ > 10 Mio. (Bending cycles) ■ 7.5 x Ø (Min. bending radius) ■ 3 m/s (Max. moving speed) ■ 5 m/s² (Max. acceleration) ■ ± 30 °/m (Max. torsion)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Component	Interface cable
Design	Straight / straight
To be used for	CS 50 Vision Sensors ...

Functional scope

Drag chain compatible	Yes
-----------------------	-----

Ambient conditions

Ambient temperature during operation	-40 ... +80 °C
Protection type	IP 67



206904
VKHM-Z-2/RJ45
Ethernet cable

Technical data (typ.)**+20°C, 24 V DC****Electrical connection**

Connection

Socket, M12, 8-pin, X-coded

Connection 2

Connector, RJ 45, 8-pin

More information / accessories**<https://www.di-soric.com/206904>**