



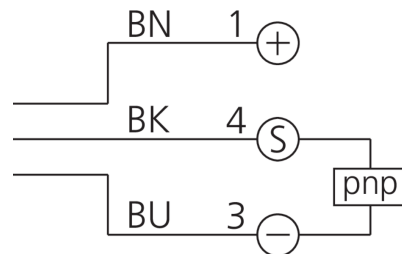

208052
DCC 08 V 2.5 PSK-TSL/40
Inductive proximity sensor

- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

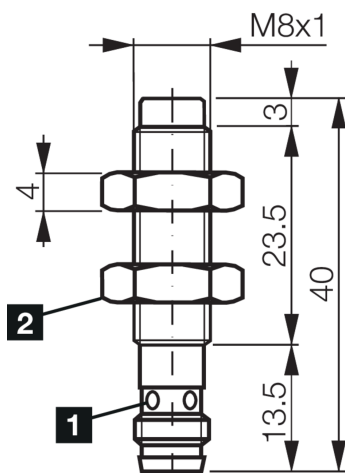

1) LED 4 x 90° (yellow)

2) Width over flats 13 mm

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V

Mechanical features

Installation type	non-flush
Thread	M8 x 1
Housing length	40 mm
Housing material	Stainless steel

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	increased operating distance
Product series	INE Industrial



208052
DCC 08 V 2.5 PSK-TSL/40
Inductive proximity sensor

Technical data (typ.)		+20°C, 24 V DC
Functional scope		
Scope of delivery	Sensor, 2 x M8 nuts	
Output, input, interface		
Switching output	pnp, 200 mA, NO	
Voltage drop (max.)	2.4 V	
Detection range, measuring range, tolerance limits		
Switching distance (SN)	2.5 mm	
Standardized measuring plate	8 x 8 x 1 mm	
Switching hysteresis (max.)	< 15 %	
Time behavior		
Switching frequency	3000 Hz	
Ambient conditions		
Ambient temperature during operation	-25 ... +70 °C	
Protection type	IP 67	
Electrical connection		
Connection	Connector, M8, 3-pin, A-coded	
Accessories		
Connection cable	TK ...	
More information / accessories		https://www.di-soric.com/208052