



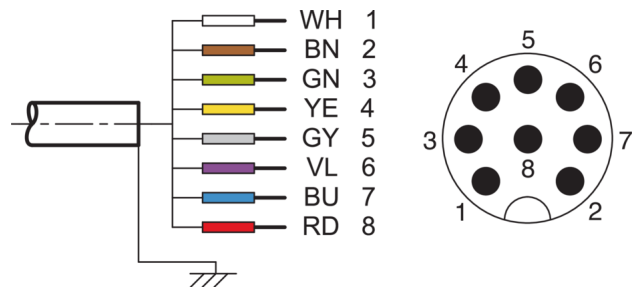

## 208130 VKHM-W-10/8 Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

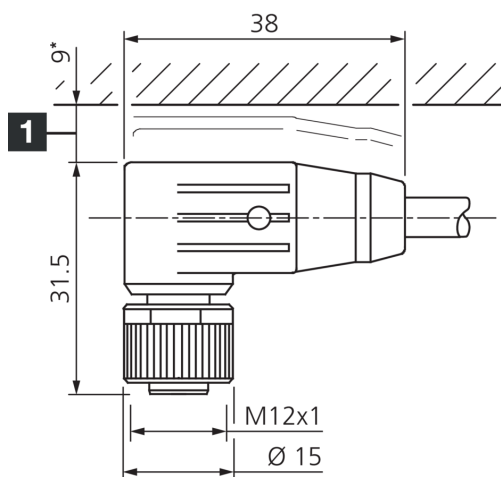

1) Mounting free space from upper edge of plug connector

BN: brown  
BU: blue

GN: green  
GY: grey

RD: red  
VL: violet

WH: white  
YE: yellow

### Function



### Technical data (typ.)

#### Electrical features

Service voltage < 30 V AC/DC

#### Mechanical features

Length 10,000 mm  
Diameter Ø 6.0 mm (Diameter)  
Thread M12  
Material of cable Polyurethane, unshielded  
Drag chain properties 90 mm (Min. bending radius)

#### Certifications, approvals

Protection class III, operation on protective low voltage

#### General features

Design Angled / open cable end  
Characteristics Metal nut

#### Functional scope

Drag chain compatible Yes

#### Display, operation

LED Anzeige No



**208130**  
**VKHM-W-10/8**  
**Connection cable**

**Technical data (typ.)****Ambient conditions**

|                                      |                                 |
|--------------------------------------|---------------------------------|
| Ambient temperature during operation | -20 ... +80 °C (Movable, Fixed) |
| Protection type                      | IP 67                           |

**Electrical connection**

|               |                             |
|---------------|-----------------------------|
| Connection    | Socket, M12, 8-pin, A-coded |
| Cross-section | 0.25 mm <sup>2</sup> (8 x)  |

**More information / accessories**

<https://www.di-soric.com/208130>