



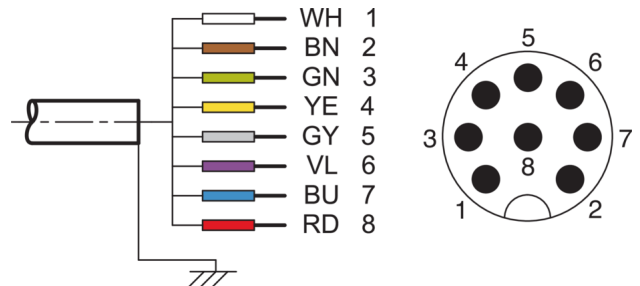

208153 VKHM-Z-2.5/8 Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

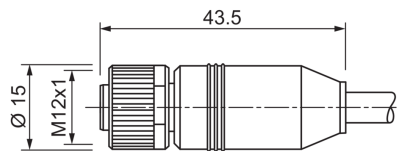

BN: brown
BU: blue

GN: green
GY: grey

RD: red
VL: violet

WH: white
YE: yellow

Function



Technical data (typ.)

Electrical features

Service voltage	30 V AC/DC
-----------------	------------

Mechanical features

Length	2,500 mm
Diameter	Ø 6.0 mm (Diameter)
Thread	M12
Material of cable	Polyurethane, unshielded
Drag chain properties	90 mm (Min. bending radius)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Design	Straight / open cable end
Characteristics	Metal nut

Functional scope

Drag chain compatible	Yes
-----------------------	-----

Display, operation

LED Anzeige	No
-------------	----

Ambient conditions

Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65 / IP 66K / IP 67



208153
VKHM-Z-2.5/8
Connection cable

Technical data (typ.)

Electrical connection

Connection

Socket, M12, 8-pin, A-coded

Cross-section

0.25 mm² (8 x)

More information / accessories

<https://www.di-soric.com/208153>