209313
DCBK 08 MN 2.5 PS-T3
Inductive proximity sensor

- Short design
- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- 4 LEDs for switching status display

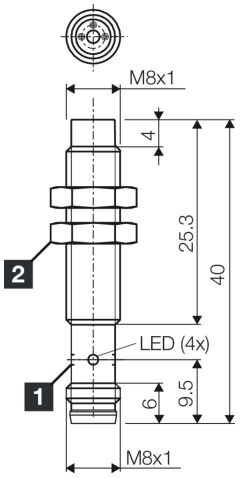

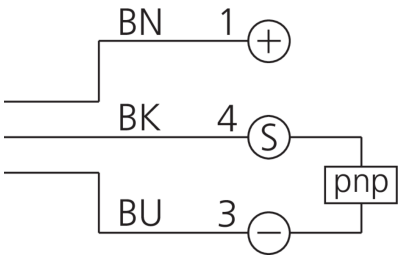

1) LED 4 x 90° (yellow) 2) Width over flats 13 mm BK: black BN: brown BU: blue

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	10 … 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V
Mechanical features	
Installation type	non-flush
Thread	M8 x 1
Housing length	40 mm
Housing material	Brass (nickel-plated)
Material	PBT (Sensor probe)
Certifications, approvals	
Protection class	III, operation on protective low voltage
General features	
Operating principle	inductive
Evaluation	digital
Design	Thread
Product series	INE Industrial

© di-soric . Right to change reserved

209313
DCBK 08 MN 2.5 PS-T3
Inductive proximity sensor

Technical data (typ.)	+20°C, 24 V DC
Functional scope	
Scope of delivery	Sensor, 2 x M8 nuts
Output, input, interface	
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	1.8 V (200 mA)
Detection range, measuring range, tolerance limits	
Switching distance (SN)	2.5 mm
Standardized measuring plate	8 x 8 x 1 mm
Switching hysteresis (max.)	1 … 20 %
Display, operation	
LED Anzeige	Yes
Time behavior	
Switching frequency	5000 Hz
MTTFd	1304 Years
MTBF	652 Years
Ambient conditions	
Ambient temperature during operation	-25 … +70 °C
Protection type	IP 67
Electrical connection	
Connection	Connector, M8, 3-pin, A-coded
Accessories	
Connection cable	TK …

More information / accessories	https://www.di-soric.com/209313

© di-soric . Right to change reserved