

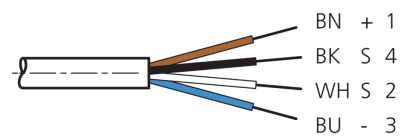


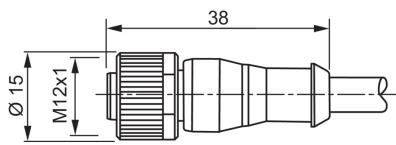

209550 VKHM-Z-15/4/LP Connection cable

- LEDs for service voltage and switching status
- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

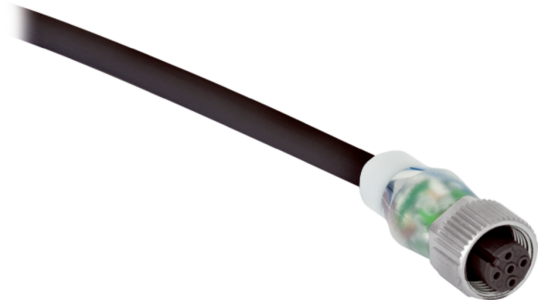

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

Electrical features

Service voltage < 31 V DC

Mechanical features

Length 15,000 mm
Diameter Ø 5.2 mm (Diameter)
Thread M12
Material of cable Polyurethane, unshielded
Drag chain properties 80 mm (Min. bending radius)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Straight / open cable end
Characteristics Metal nut

Functional scope

Drag chain compatible Yes

Display, operation

LED Anzeige Yes

Ambient conditions

Ambient temperature during operation -5 ... +80 °C (Movable, Fixed)
Protection type IP 67

Electrical connection

Connection Socket, M12, 4-pin, A-coded
Cross-section 0.34 mm² (4 x)

More information / accessories

<https://www.di-soric.com/209550>