210059
VKHM-Z-1/RJ45
Ethernet cable

- For Ethernet connection
- Drag chain compatible
- Oil-resistant

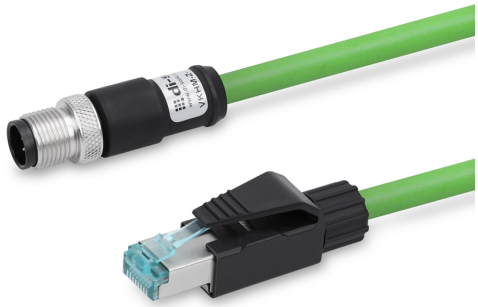

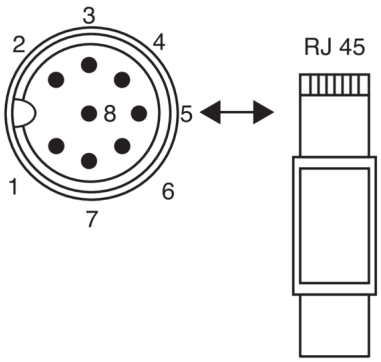

PIN	Port B: Ethernet
1	V (+)
2	V (-)
3	V (-)
4	TX (-)
5	RX (+)
6	TX (+)
7	V (+)
8	RX (-)

Function

Technical data (typ.)	**+20°C, 24 V DC**
Electrical features	
Service voltage	30 V DC
Mechanical features	
Length	1,000 mm
Thread	M12
Material of cable	Polyurethane, unshielded
Drag chain properties	■ > 10 Mio. (Bending cycles) ■ 7.5 x Ø (Min. bending radius) ■ 3 m/s (Max. moving speed) ■ 5 m/s^2 (Max. acceleration) ■ ± 30 °/m (Max. torsion)
Certifications, approvals	
Protection class	III, operation on protective low voltage
General features	
Component	Interface cable
Design	Straight / straight
To be used for	CS 50 Vision Sensors
Functional scope	
Drag chain compatible	Yes
Ambient conditions	
Ambient temperature during operation	-40 … +80 °C
Protection type	IP 67

© di-soric . Right to change reserved

210059
VKHM-Z-1/RJ45
Ethernet cable

Technical data (typ.)	+20°C, 24 V DC
Electrical connection	
Connection	Socket, M12, 8-pin, X-coded
Connection 2	Connector, RJ 45, 8-pin

More information / accessories	https://www.di-soric.com/210059

© di-soric . Right to change reserved