



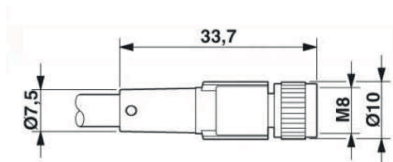

210636 TKHM-Z-5/6 Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type

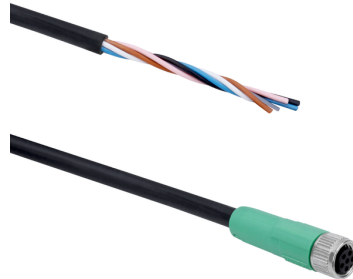

PIN	Aderfarbe wire color
1	braun / brown
2	weiss / white
3	blau / blue
4	schwarz / black
5	grau / grey
6	rosa / pink

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage < 60 V AC/DC

Mechanical features

Length 5,000 mm
Thread M8 x 1
Material of cable Polyurethane
Material Polyurethane (Connector)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Straight / open cable end
Characteristics Metal nut

Functional scope

Drag chain compatible Yes

Display, operation

LED Anzeige No

Ambient conditions

Ambient temperature during operation -25 ... +90 °C
Protection type IP 65 / IP 67 / IP 68

Electrical connection

Connection Socket, M8, 6-pin

More information / accessories

<https://www.di-soric.com/210636>



210636
TKHM-Z-5/6
Connection cable