212817
OGU 121/145 G3-T3
Fork light barrier

- 4 operating modes as an IO-Link parameter
- Switch-on/off delay as an IO-Link parameter
- Diagnostics with IO-Link
- Metal casing
- Sensitivity is adjustable
- High switching frequency
- Light/dark switching
- Bright ring LED
- High protection type

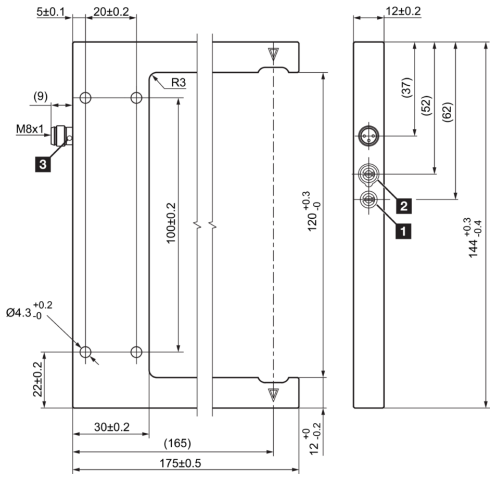

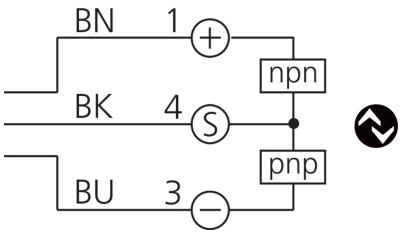

1) Potentiometer
2) NO/ NC
3) LED 4 x 90° (yellow)

BK: black BN: brown BU: blue

Function

IO-Link

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	10 … 30 V DC (Supply Class 2)
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Mechanical features	
Fork opening	120 mm
Leg length internal	145 mm
Housing dimensions	144 x 175 x 12 mm
Housing length	175 mm
Housing height	144 mm
Housing width	12 mm
Housing material	Aluminum (Black, Anodized)
Certifications, approvals	
Protection class	III, operation on protective low voltage
Approvals	UL

© di-soric . Right to change reserved

212817
OGU 121/145 G3-T3
Fork light barrier

Technical data (typ.)	+20°C, 24 V DC
General features	
Operating principle	Optical
Evaluation	digital
Design	Fork
Functional scope	
Operation modes	STANDARD, HIGH RESOLUTION, POWER, SPEED
Output, input, interface	
Switching output	Push-pull, 100 mA, NO/NC, switchable
Interface	IO-Link (V1.1, COM2 38.4 kBd, Smart Sensor Profile)
Optical data	
Light source	LED
Color	Red
Modulation	Clocked
Detection range, measuring range, tolerance limits	
Resolution (factory setting)	0.5 mm (STANDARD)
Reproducibility (factory setting)	0.02 mm (STANDARD)
Resolution (STANDARD)	0.5 mm
Reproducibility (STANDARD)	0.02 mm
Resolution (HIGH RESOLUTION)	0.3 mm
Reproducibility (HIGH RESOLUTION)	0.02 mm
Resolution (POWER)	1.5 mm
Reproducibility (POWER)	0.02 mm
Resolution (SPEED)	0.5 mm
Reproducibility (SPEED)	0.02 mm
Display, operation	
Sensitivity adjustment	Potentiometer or IO-Link
Time behavior	
Switching frequency (factory setting)	5000 Hz (STANDARD)
Switching frequency (STANDARD)	5000 Hz
Switching frequency (HIGH RESOLUTION)	1500 Hz
Switching frequency (POWER)	250 Hz
Switching frequency (SPEED)	8000 Hz
Ambient conditions	
Ambient temperature during operation	-25 … +60 °C
Protection type	IP 67
Electrical connection	
Connection	Connector, M8, 3-pin
Accessories	
Connection cable	TK …

More information / accessories	https://www.di-soric.com/212817

© di-soric . Right to change reserved