212987
OR21-PS-0.3T3
Retroreflective sensor

- Miniature design
- Mounting element made of metal
- High switching frequency
- Long range
- IO-Link
- Diagnostic function reserve

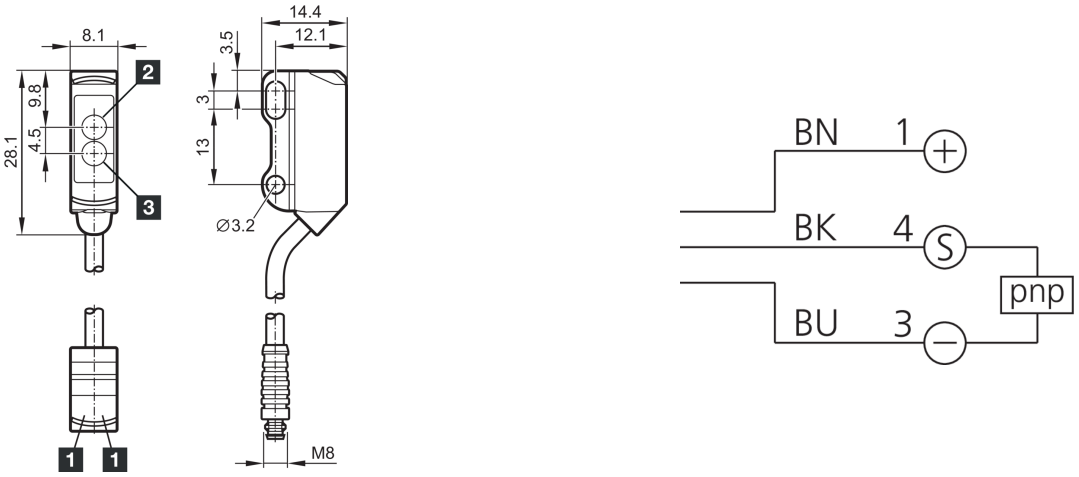

1) LED
2) Receiver
3) Transmitter

BK: black BN: brown BU: blue

Function

IO-Link

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	10 … 30 V DC
No-load current (max.)	20 mA
Inverse polarity protection	Yes
Mechanical features	
Housing dimensions	28.1 x 14.4 x 8.1 mm
Housing length	14.4 mm
Housing height	28.1 mm
Housing width	8.1 mm
Housing material	Stainless steel / Plastic
Material of cable	PVC
Material	Plastic (Window / optics)
Weight	21 g
Certifications, approvals	
Protection class	III, operation on protective low voltage
Approvals	UL

© di-soric . Right to change reserved

212987
OR21-PS-0.3T3
Retroreflective sensor

Technical data (typ.)	+20°C, 24 V DC
General features	
Operating principle	Retroreflective sensor
Evaluation	digital
Design	Cuboid design
Output, input, interface	
Switching output	pnp, 100 mA, NO/NC, configurable
Voltage drop (max.)	2.5 V
Interface	IO-Link (V1.1, COM2 38.4 kBd, Smart Sensor Profile)
Optical data	
Light source	LED
Color	Red
Wavelength	633 nm
Modulation	Clocked
Light spot size	Ø 120 mm (at distance of 1800 mm)
Detection range, measuring range, tolerance limits	
Range	20 … 1800 mm (configurable)
Range during operation with	■ 4000 mm (R 84) ■ 2100 mm (R 42) ■ 1000 mm (RFP 50) ■ 700 mm (R 21 M3)
Referring reflector	R 19 x 54 mm
Display, operation	
Sensitivity adjustment	IO-Link
Display	LED green - Operation, yellow - Switching output
Time behavior	
Switching frequency	1000 Hz
Ambient conditions	
Ambient temperature during operation	-25 … +60 °C
Protection type	IP 65 / IP 67
Electrical connection	
Connection	Pigtail, 0.3 m, M8, 3-pin
Accessories	
Connection cable	TK …
More information / accessories	**https://www.di-soric.com/212987**

© di-soric . Right to change reserved