




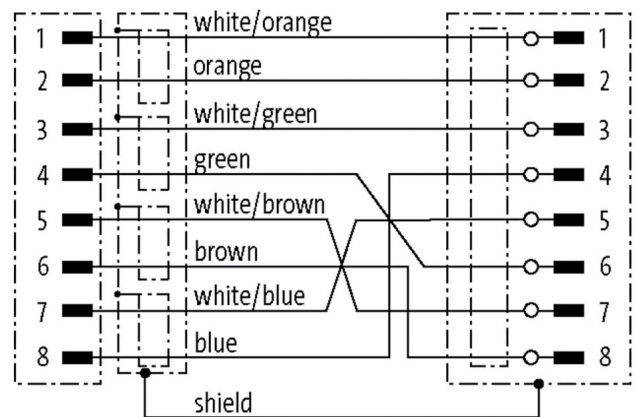

213088
VSHM-Z-10/RJ45-X
Connection cable Ethernet

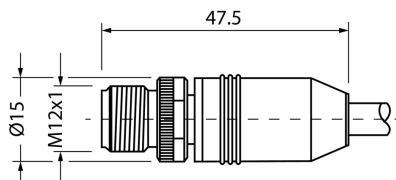

Function

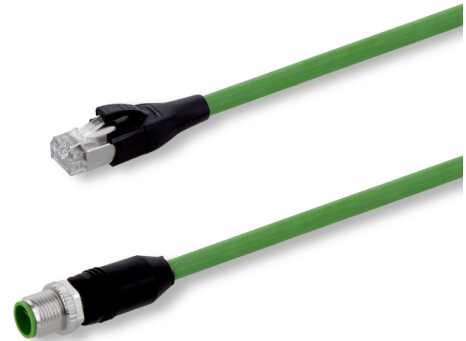

Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage 30 V DC

Mechanical features

Length 10,000 mm
Diameter Ø 6.5 mm (Diameter)
Material of cable Polyurethane, shielded
Drag chain properties 10 x Ø (Min. bending radius)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Straight / straight
To be used for CS Vision Sensors

Functional scope

Drag chain compatible Yes

Display, operation

LED Anzeige No

Ambient conditions

Ambient temperature during operation -40 ... +80 °C
Protection type IP 20



213088
VSHM-Z-10/RJ45-X
Connection cable Ethernet

Technical data (typ.)**+20°C, 24 V DC****Electrical connection**

Connection

Connector, M12, 8-pin, X-coded

Connection 2

Connector, RJ 45, 8-pin

More information / accessories<https://www.di-soric.com/213088>