



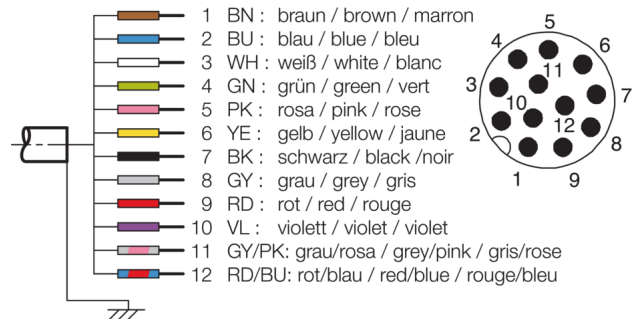

213125 VSSM-Z-5/VKM-Z/12 Connection cable

- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- For CS Vision Sensors

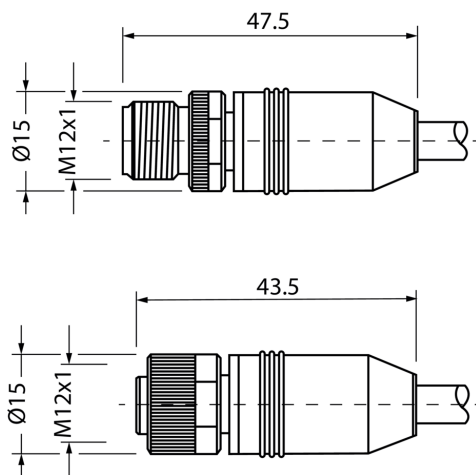

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage < 30 V AC/DC

Mechanical features

Length 5,000 mm
Diameter Ø 6.5 mm (Diameter)
Material of cable Polyurethane, unshielded
Drag chain properties 10 x Ø (Min. bending radius)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Straight / straight
To be used for CS Vision Sensors

Functional scope

Drag chain compatible Yes

Ambient conditions

Ambient temperature during operation -25 ... +80 °C
Protection type IP 67 (at tightening torque 0.6 Nm)



213125
VSSM-Z-5/VKM-Z/12
Connection cable

Technical data (typ.)

+20°C, 24 V DC

Electrical connection

Connection

Connector, M12, 12-pin, A-coded

Connection 2

Socket, M12, 12-pin, A-coded

More information / accessories

<https://www.di-soric.com/213125>