



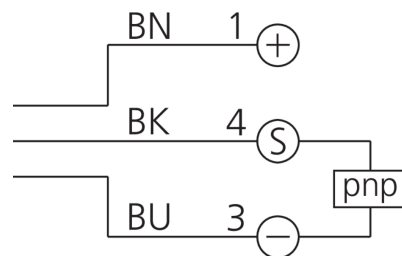

213215
INSM-6D5-B02PS-T3
Inductive proximity sensor

- Double switching distance
- Metal connector M8
- Short-circuit protection
- LED switching status display
- High protection type

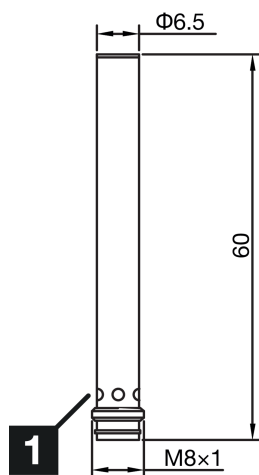

1) LED (4x)

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
Internal power consumption	10 mA
Insulation voltage endurance	< 500 V DC

Mechanical features

Installation type	Flush
Diameter	Ø 6.5 mm (Diameter)
Housing length	60 mm
Housing material	Stainless steel (V4A)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Operating principle	inductive
Evaluation	digital
Design	Cylinder
Characteristics	Double switching distance
Product series	INS Standard



213215
INSM-6D5-B02PS-T3
Inductive proximity sensor

Technical data (typ.)		+20°C, 24 V DC
Functional scope		
Scope of delivery		Sensor
Output, input, interface		
Switching output		pnp, 200 mA, NO
Voltage drop (max.)		1.5 V DC
Detection range, measuring range, tolerance limits		
Switching distance (SN)		2 mm
Standardized measuring plate		6.5 x 6.5 x 1 mm
Switching hysteresis (max.)		< 10 %
Display, operation		
LED Anzeige		Yes
Time behavior		
Switching frequency		2000 Hz
Ambient conditions		
Ambient temperature during operation		-25 ... +70 °C
Protection type		IP 67
Electrical connection		
Connection		Connector, M8, 3-pin, A-coded
More information / accessories		https://www.di-soric.com/213215