





213471 VSHM-Z-0.6/VKM-Z/5 Connection cable


- Connection cable: Connector / coupling
- Sturdy metal union nut
- Flexible lead design
- High protection type

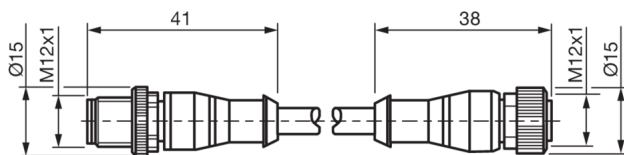

Male



Female



Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage 125 V AC/DC

Mechanical features

Length 600 mm
Material of cable Polyurethane, unshielded
Drag chain properties 10 Mio. (Bending cycles)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Component Connection cable
Design Straight / straight
To be used for Device plug M12, 5-pin

Functional scope

Drag chain compatible Yes

Ambient conditions

Ambient temperature during operation -25 ... +80 °C (Movable, Fixed)
Protection type IP 67 (at tightening torque 0.6 Nm)

Electrical connection

Connection Connector, M12, 5-pin, A-coded
Connection 2 Socket, M12, 5-pin, A-coded
Cross-section 0.34 x 0.34 mm (5 x)

More information / accessories

<https://www.di-soric.com/213471>