



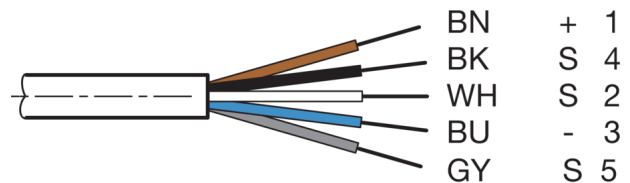

213679 VKHM-W-3/5-SB Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type

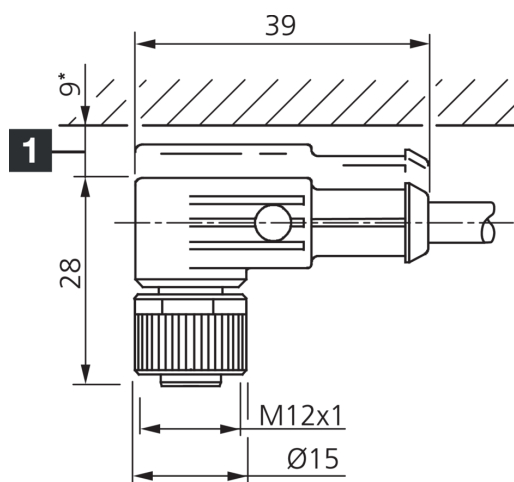

1) Mounting free space from upper edge of plug connector

Function



Technical data (typ.)

Electrical features

Service voltage < 125 V AC/DC

Mechanical features

Length 3,000 mm
Diameter Ø 4.8 mm (Diameter)
Thread M12
Material of cable Polyurethane, unshielded
Drag chain properties 48 mm (Min. bending radius)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Angled / open cable end
Characteristics Metal nut
To be used for SB-RGB

Functional scope

Drag chain compatible Yes



213679
VKHM-W-3/5-SB
Connection cable

Technical data (typ.)**Display, operation**

LED Anzeige

No

Ambient conditions

Ambient temperature during operation

-25 ... +80 °C (Movable, Fixed)

Protection type

IP 67

Electrical connection

Connection

Socket, M12, 5-pin, A-coded

Cross-section

0.34 mm² (5 x)**More information / accessories**<https://www.di-soric.com/213679>