




214597

VL-VZSA-VWKA-3JBK-750Y-S

Cable connection

- Drag chain compatible
- Sturdy metal union nut
- Flexible lead design
- High protection type

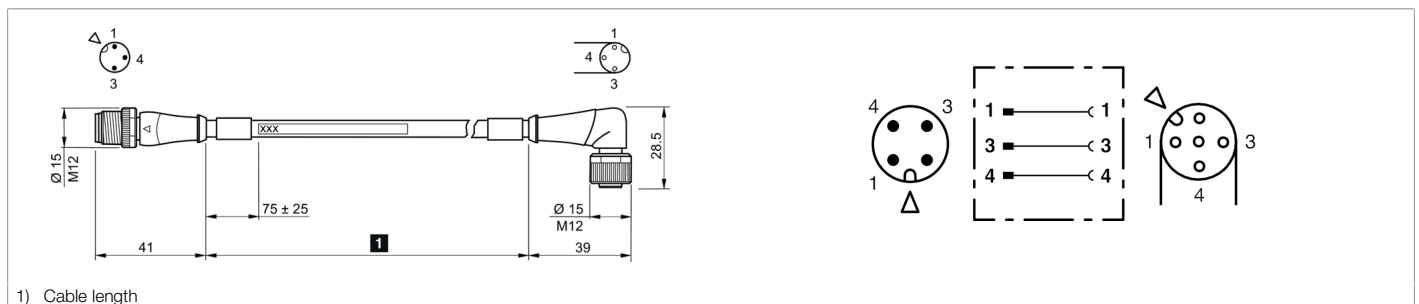

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Operating current max. 4 A / Contact

Mechanical features

Length 7,500 mm
Diameter Ø 4.1 mm (Diameter)
Thread M12 x 1
Material of cable Polyurethane, Black, unshielded
Material ■ Die-cast zinc (Socket)
■ Die-cast zinc (Connector)
Weight 250 g
Drag chain properties 10 x Ø (Min. bending radius)
Tightening torque 0.6 Nm (recommended)

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Straight / angled
Characteristics Metal nut

Functional scope

Drag chain compatible Yes

Ambient conditions

Temperature range -25 ... +80 °C (Movable), -40 ... +80 °C (Fixed)
Protection type IP 65 / IP 66K / IP 67

**214597****VL-VZSA-VWKA-3JBK-750Y-S****Cable connection****Technical data (typ.)****+20°C, 24 V DC****Electrical connection**

Connection

Connector, M12, 3-pin, A-coded

Connection 2

Socket, M12, 3-pin, A-coded

Cross-section

0.34 x 0.34 mm (3 x)

More information / accessories**<https://www.di-soric.com/214597>**