




214673

VL-VZSA-VWKA-4PBK-100Y

Cable connection

- Sturdy metal union nut
- Flexible lead design
- High protection type

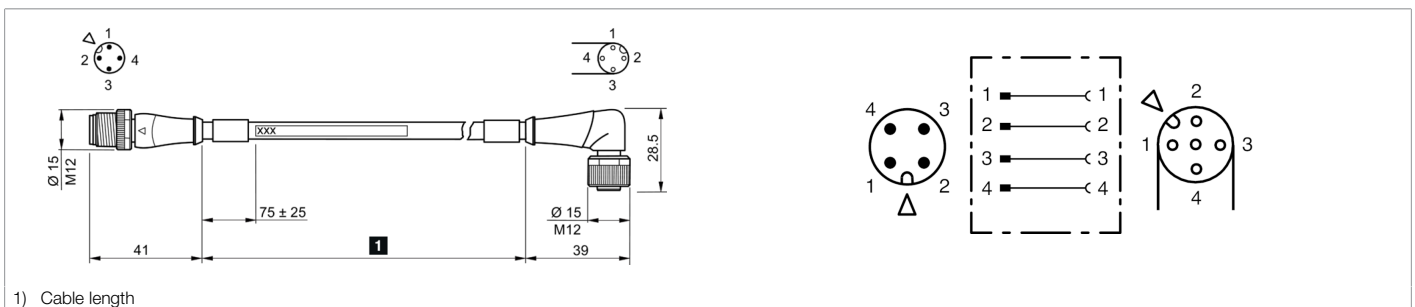

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Operating current max. 4 A / Contact

Mechanical features

Length 1,000 mm
Diameter Ø 5.0 mm (Diameter)
Thread M12 x 1
Material of cable PVC, Black, unshielded
Material ■ Die-cast zinc (Socket)
■ Die-cast zinc (Connector)
Weight 64 g
Tightening torque recommended

Certifications, approvals

Protection class III, operation on protective low voltage

General features

Design Straight / angled
Characteristics Metal nut

Ambient conditions

Temperature range -5 ... +80 °C (Movable), -30 ... +80 °C (Fixed)
Protection type IP 65 / IP 66K / IP 67

Electrical connection

Connection Connector, M12, 4-pin, A-coded
Connection 2 Socket, M12, 4-pin, A-coded
Cross-section 0.34 x 0.34 mm (4 x)

More information / accessories

<https://www.di-soric.com/214673>



214673

VL-VZSA-VWKA-4PBK-100Y

Cable connection