




## 214675 VL-VZSA-VWKA-4PBK-200Y Cable connection

- Sturdy metal union nut
- Flexible lead design
- High protection type

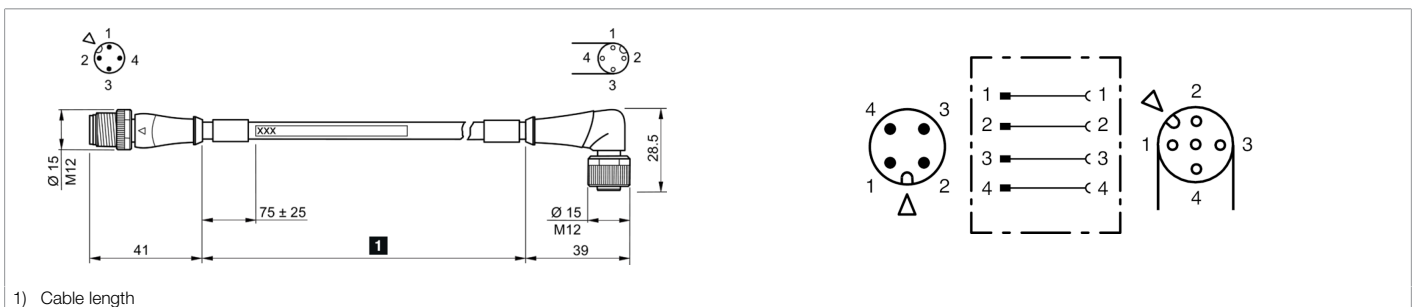

### Function



### Technical data (typ.)

+20°C, 24 V DC

### Electrical features

Operating current max. 4 A / Contact

### Mechanical features

Length 2,000 mm  
Diameter Ø 5.0 mm (Diameter)  
Thread M12 x 1  
Material of cable PVC, Black, unshielded  
Material ■ Die-cast zinc (Socket)  
■ Die-cast zinc (Connector)  
Weight 104 g  
Tightening torque recommended

### Certifications, approvals

Protection class III, operation on protective low voltage

### General features

Design Straight / angled  
Characteristics Metal nut

### Ambient conditions

Temperature range -5 ... +80 °C (Movable), -30 ... +80 °C (Fixed)  
Protection type IP 65 / IP 66K / IP 67

### Electrical connection

Connection Connector, M12, 4-pin, A-coded  
Connection 2 Socket, M12, 4-pin, A-coded  
Cross-section 0.34 x 0.34 mm (4 x)

### More information / accessories

<https://www.di-soric.com/214675>



**214675**

**VL-VZSA-VWKA-4PBK-200Y**

**Cable connection**