




214722

VL-TZSA-TWKA-3PBK-1000X

Cable connection

- Sturdy metal union nut
- Flexible lead design
- High protection type

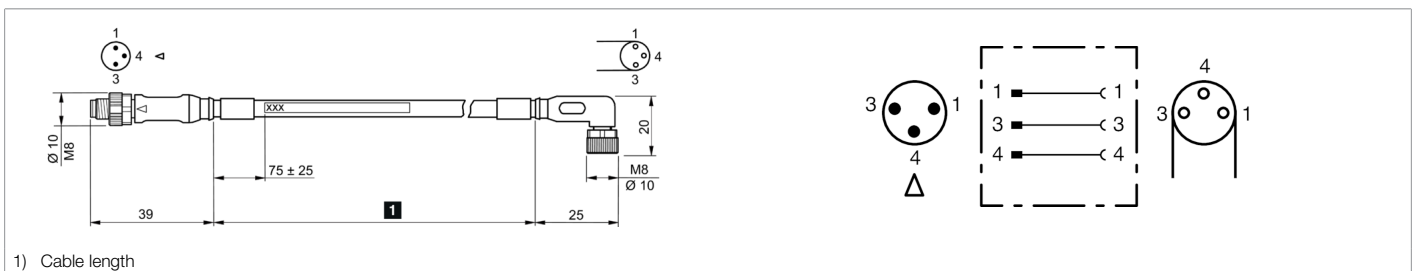

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	max. 50 V AC / max. 60 V DC
Operating current	max. 4 A / Contact

Mechanical features

Length	10,000 mm
Diameter	Ø 4.5 mm (Diameter)
Thread	M8 x 1
Material of cable	PVC, Black, unshielded
Material	■ Die-cast zinc (Socket) ■ Die-cast zinc (Connector)
Weight	280 g
Tightening torque	0.4 Nm (recommended)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Design	Straight / angled
Characteristics	Metal nut

Ambient conditions

Temperature range	-5 ... +80 °C (Movable), -30 ... +80 °C (Fixed)
Protection type	IP 65 / IP 66K / IP 67

Electrical connection

Connection	Connector, M8, 3-pin, A-coded
Connection 2	Socket, M8, 3-pin, A-coded
Cross-section	0.25 x 0.25 mm (3 x)

More information / accessories

<https://www.di-soric.com/214722>



214722

VL-TZSA-TWKA-3PBK-1000X

Cable connection