214933
AL-VZKA-12JBK-1000W-AS
Connection cable

- Sturdy metal union nut
- Flexible lead design
- High protection type
- Robust PUR coating
- 12-pin
- Drag chain compatible
- Shielded

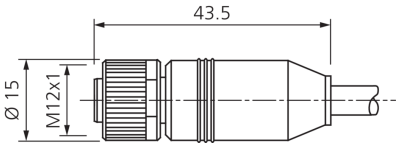

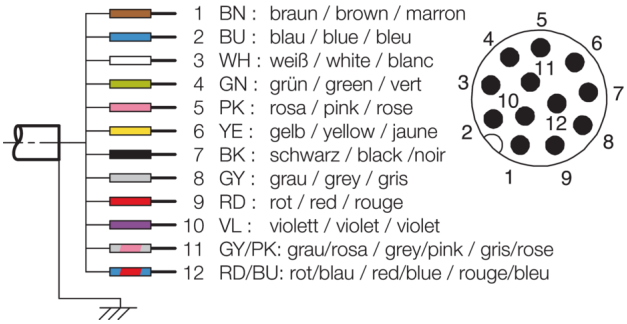

Function

Technical data (typ.)	
Electrical features	
Service voltage	max. 30 V AC/DC (with max. 1.5 A)
Mechanical features	
Length	10,000 mm
Diameter	Ø 6.5 mm (Diameter)
Thread	M12
Material of cable	Polyurethane, Black, shielded
Drag chain properties	■ > 10 Mio. (Bending cycles) ■ Fixed: 5 x Ø, Movable: 10 x Ø (Min. bending radius) ■ 3 m/s (Max. moving speed) ■ 180 °/m (Max. torsion)
General features	
Component	Connection cable
Design	Straight / open cable end
Characteristics	Metal nut
To be used for	CS 6x Vision Sensors, ID Reader - ID 6x0
Functional scope	
Drag chain compatible	Yes
Display, operation	
LED Anzeige	No
Ambient conditions	
Ambient temperature during operation	-25 … +85 °C
Protection type	IP 65 / IP 66K / IP 67

© di-soric . Right to change reserved

214933
AL-VZKA-12JBK-1000W-AS
Connection cable

Technical data (typ.)	
Electrical connection	
Connection	Socket, M12, 12-pin, A-coded, 12 x 0.14 mm^2

More information / accessories	https://www.di-soric.com/214933

© di-soric . Right to change reserved . 23.02.2026 . Page 2 (2)