214941
AL-VWKA-12JBK-2500W-AS
Connection cable

- Sturdy metal union nut
- Flexible lead design
- High protection type
- Robust PUR coating
- Shielded
- Drag chain compatible



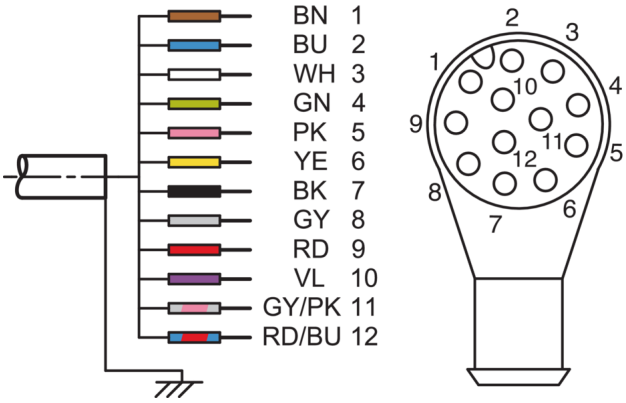

Function

Technical data (typ.)	
Electrical features	
Service voltage	30 V DC / 30 V AC
Mechanical features	
Length	25,000 mm
Diameter	Ø 6.5 mm (Diameter)
Material of cable	Polyurethane, Black, unshielded
Drag chain properties	■ > 5 Mio. (Bending cycles) ■ Fixed: 5 x Ø, Movable: 10 x Ø (Min. bending radius) ■ 3.3 m/s (Max. moving speed) ■ ± 30 °/m (Max. torsion)
General features	
Component	Connection cable
Design	Angled / open cable end
Characteristics	Metal nut
To be used for	CS 6x Vision Sensors, ID Reader - ID 6x0
Display, operation	
LED Anzeige	No
Ambient conditions	
Ambient temperature during operation	-25 … +85 °C
Protection type	IP 65 / IP 66K / IP 67

© di-soric . Right to change reserved . 23.02.2026 . Page 1 (2)

214941
AL-VWKA-12JBK-2500W-AS
Connection cable

Technical data (typ.)	
Electrical connection	
Connection	Socket, M12 x 1, 12-pin, A-coded

More information / accessories	https://www.di-soric.com/214941

© di-soric . Right to change reserved