




214957 VL-RZSX-VZKX-8JGN-1000W-AS Cable connection

- Sturdy metal union nut
- Flexible lead design
- High protection type
- Robust PUR coating
- Drag chain compatible
- Shielded

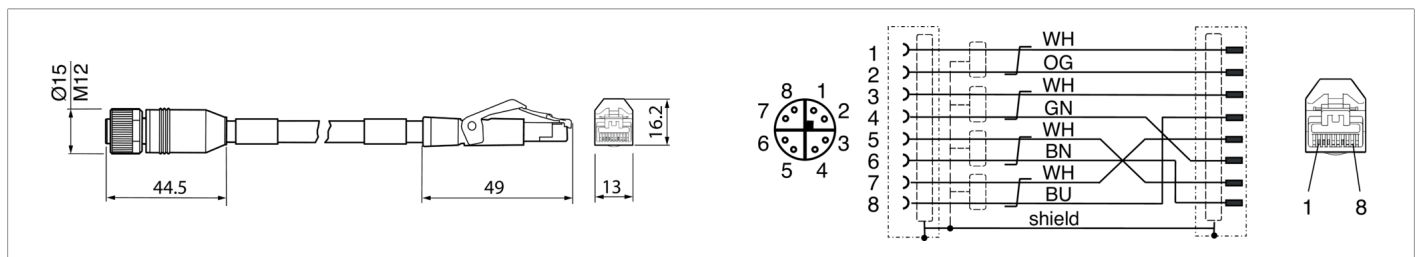

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage 60 V DC

Mechanical features

Length 10,000 mm
Diameter Ø 6.4 mm (Diameter)
Material of cable Polyurethane, green, shielded
Tightening torque 0.6 Nm

General features

Design Straight / straight

Functional scope

Drag chain compatible Yes

Output, input, interface

Transmission parameters CAT6A

Display, operation

LED Anzeige No

Electrical connection

Connection Socket, M12, 8-pin, X-coded
Connection 2 Connector, RJ 45, 8-pin
Cross-section 0.14 x 0.14 mm (8 x)

More information / accessories

<https://www.di-soric.com/214957>