




214967 VL-RZSX-VZKX-8TGN-1000W-AR Cable connection

- Sturdy metal union nut
- Flexible lead design
- High protection type
- Connection cable made of TPE
- Drag chain compatible
- Shielded

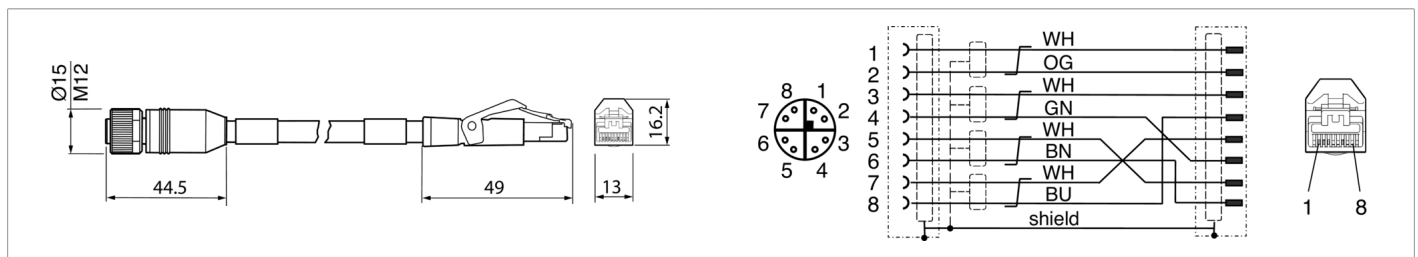

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	max. 60 V DC
Operating current	max. 0.5 A / Contact

Mechanical features

Length	10,000 mm
Diameter	Ø 7.4 mm (Diameter)
Material of cable	TPE, turquoise blue, shielded
Drag chain properties	■ > 1 Mio. (Bending cycles) ■ 10 x Ø (Min. bending radius)
Tightening torque	0.6 Nm

General features

Design	Straight / straight
--------	---------------------

Functional scope

Drag chain compatible	Yes
-----------------------	-----

Output, input, interface

Transmission parameters	CAT6A
-------------------------	-------

Display, operation

LED Anzeige	No
-------------	----

Ambient conditions

Temperature range	-40 ... +80 °C (Movable), -40 ... +80 °C (Fixed)
Protection type	IP 65 / IP 67 (Connector / coupling M8 / M12) / IP 65 (Connector RJ 45) / IP 67 / IP 20

Electrical connection

Connection	Socket, M12, 8-pin, X-coded
Connection 2	Connector, RJ 45, 8-pin, X-coded
Cross-section	0.14 x 0.14 mm (8 x)

**214967****VL-RZSX-VZKX-8TGN-1000W-AR****Cable connection**[More information / accessories](#)<https://www.di-soric.com/214967>