214968
VL-RZSX-VZKX-8TGN-1500W-AR
Cable connection

- Sturdy metal union nut
- Flexible lead design
- High protection type
- Connection cable made of TPE
- Drag chain compatible
- Shielded

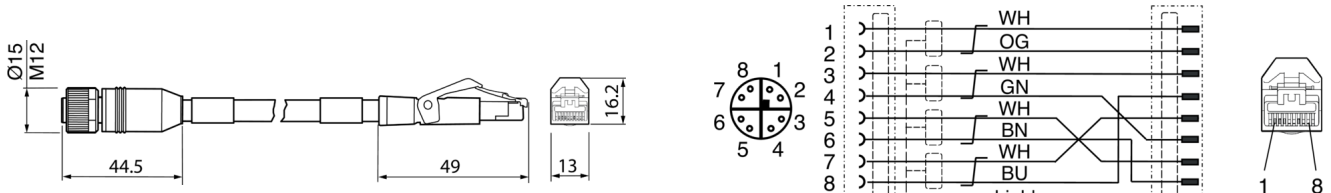

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	max. 60 V DC
Operating current	max. 0.5 A / Contact
Mechanical features	
Length	15,000 mm
Diameter	Ø 7.4 mm (Diameter)
Material of cable	TPE, turquoise blue, shielded
Drag chain properties	■ > 1 Mio. (Bending cycles) ■ 10 x Ø (Min. bending radius)
Tightening torque	0.6 Nm
General features	
Design	Straight / straight
Functional scope	
Drag chain compatible	Yes
Output, input, interface	
Transmission parameters	CAT6A
Display, operation	
LED Anzeige	No
Ambient conditions	
Temperature range	-40 … +80 °C (Movable), -40 … +80 °C (Fixed)
Protection type	IP 65 / IP 67 (Connector / coupling M8 / M12) / IP 65 (Connector RJ 45) / IP 67 / IP 20
Electrical connection	
Connection	Socket, M12, 8-pin, X-coded
Connection 2	Connector, RJ 45, 8-pin, X-coded
Cross-section	0.14 x 0.14 mm (8 x)

© di-soric . Right to change reserved

More information / accessories	**https://www.di-soric.com/214968**

© di-soric . Right to change reserved