



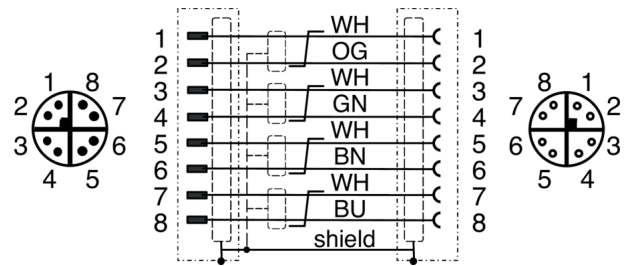

215005 VL-VZSX-VZKX-8JGN-1000W-AS Cable connection

- Sturdy metal union nut
- Flexible lead design
- High protection type
- Robust PUR coating
- Drag chain compatible
- Shielded



Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	max. 250 V AC/DC
Operating current	max. 0.5 A / Contact

Mechanical features

Length	10,000 mm
Diameter	Ø 6.4 mm (Diameter)
Material of cable	Polyurethane, green, shielded
Material	■ Die-cast zinc (Connector) ■ Die-cast zinc (Socket)
Weight	124 g
Tightening torque	0.6 Nm (recommended)

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Design	Straight / straight
Characteristics	Metal nut

Functional scope

Drag chain compatible	Yes
-----------------------	-----

Ambient conditions

Temperature range	-25 ... +85 °C (Movable), -25 ... +85 °C (Fixed)
Protection type	IP 65 / IP 67

**215005****VL-VZSX-VZKX-8JGN-1000W-AS****Cable connection****Technical data (typ.)****+20°C, 24 V DC****Electrical connection**

Connection

Connector, M12, 8-pin, X-coded

Connection 2

Socket, M12, 8-pin, X-coded

Cross-section

0.14 x 0.14 mm (8 x)

More information / accessories**<https://www.di-soric.com/215005>**