215006
VL-VZSX-VZKX-8JGN-1500W-AS
Cable connection

- Sturdy metal union nut
- Flexible lead design
- High protection type
- Robust PUR coating
- Drag chain compatible
- Shielded



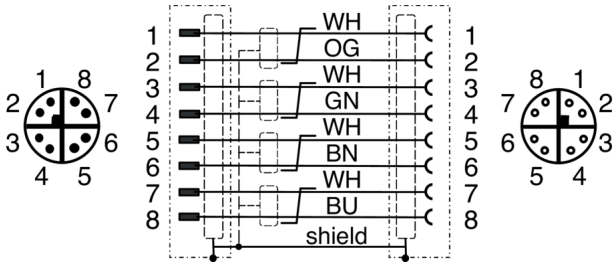

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	max. 250 V AC/DC
Operating current	max. 0.5 A / Contact
Mechanical features	
Length	15,000 mm
Diameter	Ø 6.4 mm (Diameter)
Material of cable	Polyurethane, green, shielded
Material	■ Die-cast zinc (Connector) ■ Die-cast zinc (Socket)
Tightening torque	0.6 Nm (recommended)
Certifications, approvals	
Protection class	III, operation on protective low voltage
General features	
Design	Straight / straight
Characteristics	Metal nut
Functional scope	
Drag chain compatible	Yes
Ambient conditions	
Temperature range	-25 … +85 °C (Movable), -25 … +85 °C (Fixed)
Protection type	IP 65 / IP 67
Electrical connection	
Connection	Connector, M12, 8-pin, X-coded
Connection 2	Socket, M12, 8-pin, X-coded
Cross-section	0.14 x 0.14 mm (8 x)

© di-soric . Right to change reserved

More information / accessories	**https://www.di-soric.com/215006**

© di-soric . Right to change reserved