





215160

INE-M08/31V-B02G3-0.3TR

Inductive proximity sensor

- IO-Link
- Short-circuit protection
- LED
- High protection type
- Sturdy PUR cable
- Drag chain compatible

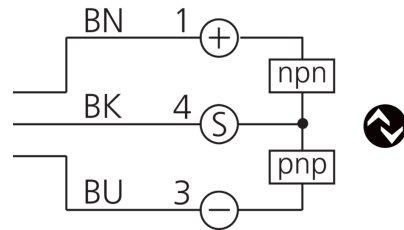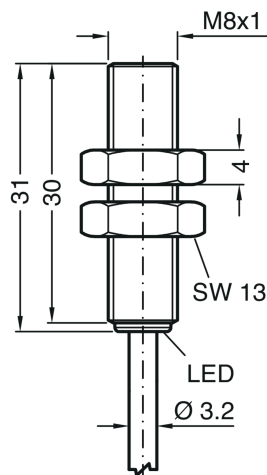

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
No-load current (max.)	< 17 mA
Ripple	< 10 %
Inverse polarity protection	Yes
Short-circuit protection	Yes

Mechanical features

Installation type	Flush
Thread	M8 x 1
Housing length	31 mm
Housing material	Stainless steel
Material of cable	Polyurethane, gray
Material of sensor probe	PBT
Tightening torque	7 Nm

Certifications, approvals

Protection class	III, operation on protective low voltage
Approvals	UL



215160
INE-M08/31V-B02G3-0.3TR
Inductive proximity sensor

Technical data (typ.)		+20°C, 24 V DC
General features		
Operating principle	inductive	
Evaluation	digital	
Design	Thread	
Product series	INE Industrial	
Functional scope		
Scope of delivery	Sensor, 2 x M8 nuts, 2 x washers	
Output, input, interface		
Switching output	Push-pull/PNP/NPN, 100 mA, NO/NC, switchable via IO-Link	
Voltage drop (max.)	1.2 V DC (100 mA)	
Interface	IO-Link V1.1.5	
Detection range, measuring range, tolerance limits		
Switching distance (SN)	2 mm	
Standardized measuring plate	8 x 8 x 1 mm	
Display, operation		
Sensitivity adjustment	IO-Link	
LED Anzeige	Yes	
Display	LED green - Switching output, yellow - Overload display	
Time behavior		
Switching frequency	2000 Hz	
Ambient conditions		
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm	
Ambient temperature during operation	-25 ... +80 °C	
Ambient temperature storage	-25 ... +80 °C	
Ambient humidity operation	35 ... 95 %	
Ambient humidity storage	35 ... 95 %	
Temperature drift	< 10 %/Sn	
Protection type	IP 67	
Electrical connection		
Connection	Pigtail, 0.3 m, M8, 3-pin, A-coded	
More information / accessories		https://www.di-soric.com/215160