215213
CS62-BM38-EP15/400ID/OCR
CS 62 Vision Sensor

- Localization, parts detection, counting measuring, reading codes and plain text
- Upgrade option: Smart licenses
- The specialist, compact and high-performance
- High power LED illumination in red and white
- Flexible and productive Software nVision-i
- Parameter changes via linked Profinet inputs during execution
- Simple & intuitive parameterization
- Flexible working distances of 50 - 2,000 mm by changing lenses

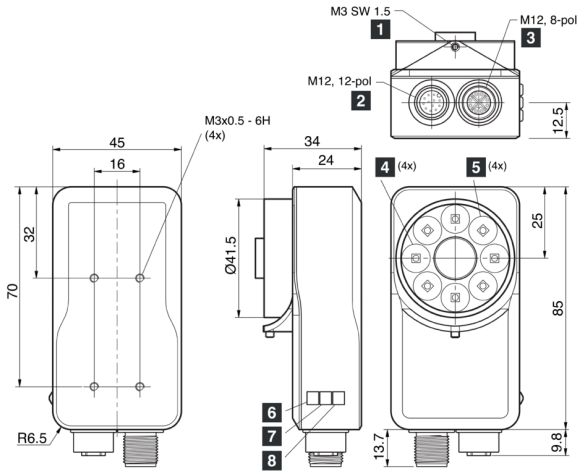

1) Lens cover lock
2) A-coded
3) X-coded
4) LED (red)
5) LED (white)
6) LED Trigger (green)
7) LED LAN (yellow)
8) LED Operation (green)

12-pol A-codiert

1	PLC_IN0	7	+UB
2	PLC_IN1	8	GND
3	OUT_2	9	NC
4	OUT_3	10	Trigger IN
5	READY	11	OUT_0
6	COMMON INTERFACE	12	OUT_1

8-pol X-codiert

1	LAN A+	5	LAN D+
2	LAN A-	6	LAN D-
3	LAN B+	7	LAN C-
4	LAN B-	8	LAN C+

Function

PROFINET EtherNet/IP™

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	18 … 30 V DC
No-load current (max.)	1000 mA (24 V DC)
Insulation voltage endurance	500 V
Mechanical features	
Housing material	Aluminum (Black, Anodized)
Material	PMMA (Window / optics)
Lens connection	S-mount
Weight	185 g
Certifications, approvals	
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Risk group 1
Approvals	UL

© di-soric . Right to change reserved

215213
CS62-BM38-EP15/400ID/OCR
CS 62 Vision Sensor

Technical data (typ.)	+20°C, 24 V DC
General features	
Model	CS 62
Design	Cuboid design
Sensor type	SONY IMX296LLR
Functional scope	
Inspection tasks	Localization, Parts recognition, Counting, Measurement, Reading codes and plain text
Shutter	global
Code type - 1D-Codes (barcodes)	Code 2 of 5, Codabar, Code 128, Code 39, Databar, UPC / EAN, Pharmacode
Code type - 2D-Codes	Aztec Code, Data Matrix, Dotcode, QR
Code type - Stacked codes	PDF 417
Scope of delivery	CS62-BM38-EP15/400ID/OCR, O-S1-S-080-40
Internal lights	High power lighting white and red can be switched via software
Output, input, interface	
Switching output	Push-pull, 100 mA
Switching output number	4 (programmable, 1 (Ready))
Voltage drop (max.)	2 V
Interface	Digital Input/Output
Protocols	TCP/IP, FTP/SFTP, Profinet, EtherNet/IP
Optical data	
Color	Red / white switchable (internal)
Focal length	8 mm (exchangeable S-mount lens)
Optical format	1/2.9"
Detection range, measuring range, tolerance limits	
Resolution	1456 x 1088 Pixel (1.6 MP)
Working distance	50.0 … 2000 mm
Display, operation	
Display	LED green - Operation, yellow - DATA-Link yellow - Trigger
Time behavior	
FPS - Frames Per Second (max.)	30 images/second
Flash length	< 2 ms
Ambient conditions	
Ambient temperature during operation	0 … +50 °C
Vibration/shock resistance	10 to 55 Hz / 1.0 mm / 30 g / 11 ms
Protection type	IP 67
Electrical connection	
Connection	Connector, M12, 12-pin (A-coded)
Connection 2	Socket, M12, 8-pin (X-coded)
Cable	Connection cables max. 25 m

More information / accessories	https://www.di-soric.com/215213

© di-soric . Right to change reserved . 13.08.2026 . Page 2 (2)